

ATTENUATOR TAB & COVER 150 WATT



DATA SHEET

PART SERIES: 83A7034TCXX.XXF

SHEET 1 OF 2
Dwg 83A7034TCF

EN 13-3533
Revision -

FEATURES


- Tab Launch
- High Power
- Excellent Heat Transfer
- Low VSWR
- Easy Installation
- Wide Attenuation Offering

APPLICATIONS

- Mobile Networks
- Broadcast
- High Power Amplifiers
- Isolators
- Military
- Instrumentation

GENERAL DESCRIPTION

EMC Technology offers the widest selection of flangeless attenuators worldwide. Tab and cover components offer the highest performance of any style of attenuator component.

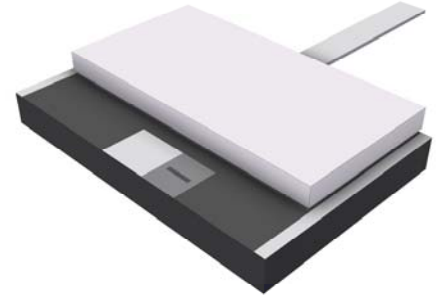

ORDERING INFORMATION

Part Identifier:

83A7034TCXX.XXF

Attenuation Value

SPECIFICATIONS

1.0 ELECTRICAL

Nominal Impedance:	50 ohms
Frequency Range:	DC - 2.2 GHz
Attenuation Values Available:	1 through 20 dB in 1 dB increments and 30 dB
Attenuation Accuracy:	1 through 20 dB \pm 0.5 dB 30 dB \pm 1.0 dB
Input Power CW:	150 watts @ 100°C heat sink, derated linearly to zero power at 150°C
Peak Power:	1500 watts (based on 10us pulse width and 1% duty cycle)
VSWR:	DC - 1 GHz 1.15:1 Max 1 - 2 GHz 1.35:1 Max 2 - 2.2 GHz 1.40:1 Max

2.0 ENVIRONMENTAL

Operating Temperature:	-55°C to +150°C
Non-operating Temperature:	-65°C to +150°C
Temperature Coefficient:	+/-200 PPM / °C max

3.0 MARKING

Unit Marking: Logo and Attenuation value, legibility and permanency per MIL-STD-130

4.0 QUALITY ASSURANCE

Sample Inspect Per MIL-STD-105, Level II, 1.0% AQL.
Visual and Mechanical Examination for Conformance To Outline Drawing Requirements.
Measure Attenuation and VSWR
Data Retention – Standard

5.0 PACKAGING

Standard Packaging: Tray

ATTENUATOR TAB & COVER 150 WATT



DATA SHEET



PART SERIES: 83A7034TCXX.XXF

SHEET 2 OF 2
Dwg 83A7034TCF

EN 13-3533
Revision -

6.0 MECHANICAL

Substrate Material:	Aluminum Nitride
Resistive Film:	Thin Film
Cover Material:	Alumina
Tab Material:	Beryllium Copper
Tab Finish:	Silver plated
Metric Dimensions:	Provided for reference only

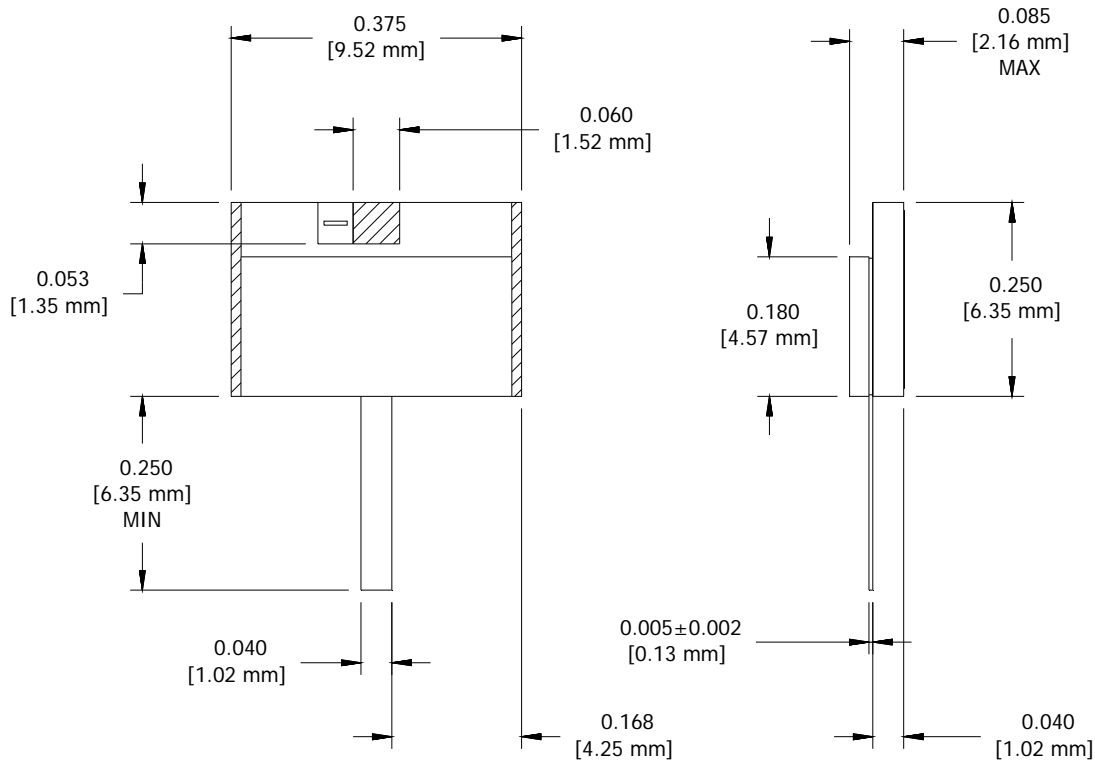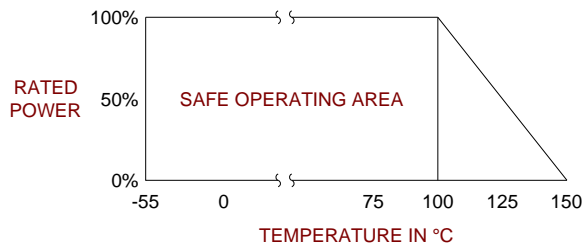

Unless Otherwise Specified: TOLERANCE: X.XX = ± 0.02 X.XXX = ± 0.010