


Ka-Band Waveguide Filter

Part Number: 7WR28-35000/600-C

Projected Mechanics

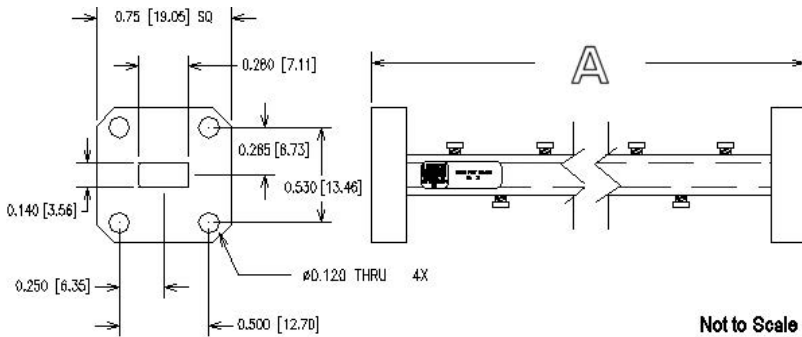

A = 2.22" [56.39 mm]

Dimensions: Inches [Millimeters] All dimensions are approximate.

Projected Response



Important: Performance of hardware may deviate from the response shown above. However, the filter will comply with the specifications shown on the specification sheet.

Product Configuration

Part Number	7WR28-35000/600-C
Series	Waveguide Filter Series
Center Frequency	35000.00 MHz
3.0 dB Passband Bandwidth	600.00 MHz min
Insertion Loss at Midband	1.53 dBa max.
VSWR	1.5:1 typ.
Stopband Attenuation	60 dBc min. at 34000 MHz
Power Handling	1 Watt avg.
Temperature Range	-45 to 85 deg. C

Americas

Sales
focom.uscsr@smithsinterconnect.com

Technical support
focom.techsupport@smithsinterconnect.com

Europe

Sales
focom.emeacsr@smithsinterconnect.com

Technical support
focom.techsupport@smithsinterconnect.com

Asia

Sales
focom.asiacsr@smithsinterconnect.com

Technical support
focom.techsupport@smithsinterconnect.com

more > smithsinterconnect.com | [in](#) [twitter](#) [youtube](#)