


- NOTES:  
 1. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± .010" [.254mm].  
 2. DIMENSIONS APPLY BEFORE SOLDER. ALLOW 0.020 MAX. FOR ALL PRETINNED SURFACES.

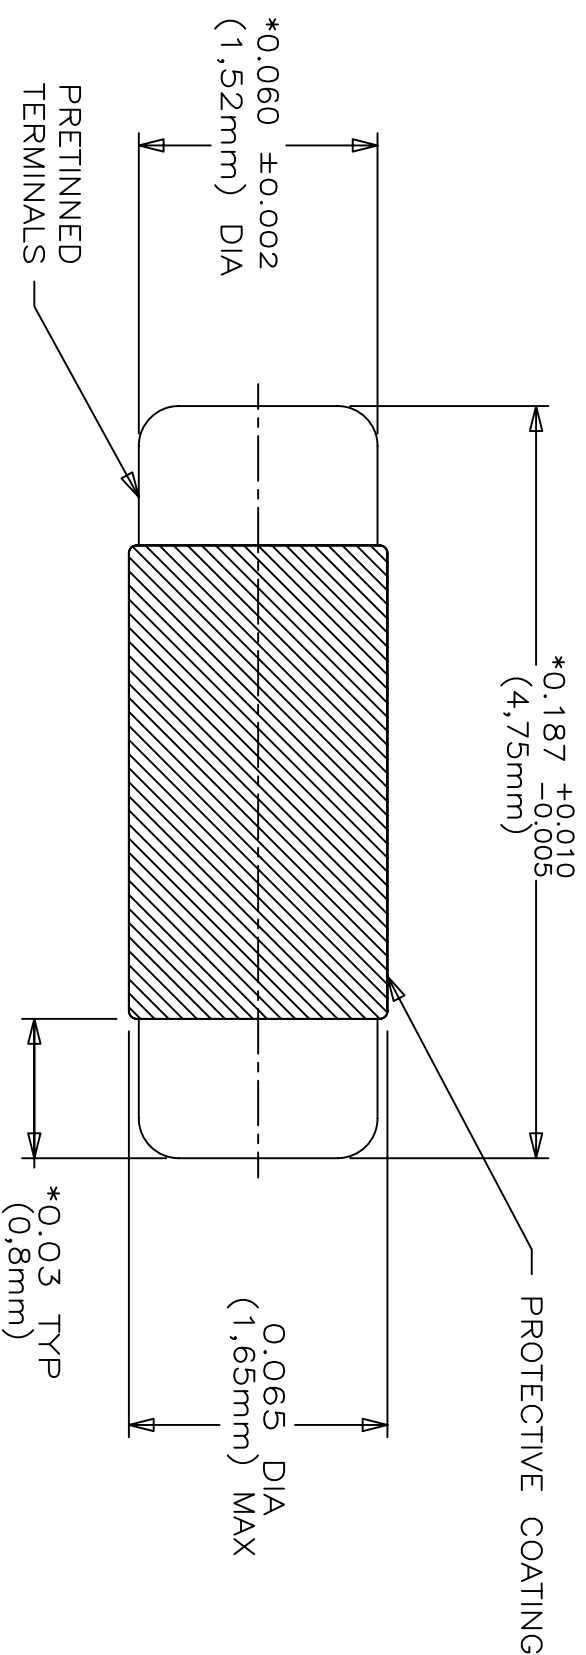

MATERIALS:  
 SUBSTRATE: BERYLLIA 99.5%  
FINISH:  
 TERMINAL: SOLDER COATED NICKEL  
ELECTRICAL:  
 AVERAGE POWER: 1 WATT MAX.  
 DC RESISTANCE: 10 OHMS – 250 OHMS  
 OPERATING TEMPERATURE: -55°C TO +125°C

REFERENCE	-	TOLERANCES	UNLESS OTHERWISE SPECIFIED		THE INFORMATION CONTAINED HEREIN IS: (A) CONSIDERED PROPRIETARY TO FLORIDA RF LABS INC.; (B) PROTECTED BY COPYRIGHT OWNED BY FLORIDA RF LABS INC.; (C) CONSIDERED A WORK FOR HIRE UNDER FEDERAL LAWS; (D) CONSIDERED A TRADE SECRET UNDER FEDERAL LAWS; (E) THE MISAPPROPRIATION OF THIS INFORMATION AND (F) IS TO BE USED SOLELY FOR THE PURPOSE WHICH IT IS SUPPLIED. THIS INFORMATION SHALL NOT BE DISCLOSED IN WHOLE OR IN PART, TO ANY OTHER PARTY WITHOUT THE WRITTEN CONSENT OF FLORIDA RF LABS INC.
FINISH	-	FRACT XXX XXX XXXX	+/-0.01 +/-0.005	DIMENSIONS ARE IN INCHES	
MATERIAL	-	DATE	2008 05/16	DRAWN BY OJC	APPROVED BY
EN#	PRELIMINARY	REV	C	DATE	05/16/08
CHANGE DESCRIPTION		CAGE CODE ID NO.	2Y194	PLOT SCALE	
		FLORIDA RF LABS INC. 8851 SW OLD KANSAS AVE STUART, FL 34997 PHONE NO. (772) 286-9300 FAX NO. (772) 283-5286		TITLE RESISTOR, ROD, ASSEMBLY	
		DRAWING NUMBER		R060-187B*	
		SHEET		-	