

# ATTENUATOR TAB & COVER 10 WATT



DATA SHEET

PART SERIES: 83-3005TC-XX.XX

SHEET 1 OF 2  
Dwg 83-3005TC

EN 13-3533  
Revision -

## FEATURES


Tab Launch  
High Power  
Excellent Heat Transfer  
Low VSWR  
Easy Installation  
Wide Attenuation Offering

## APPLICATIONS

Mobile Networks  
Broadcast  
High Power Amplifiers  
Isolators  
Military  
Instrumentation

## GENERAL DESCRIPTION

EMC Technology offers the widest selection of flangeless attenuators worldwide. Tab and cover components offer the highest performance of any style of attenuator component.

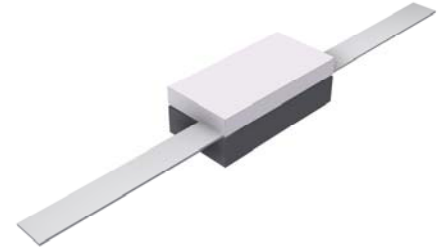

## ORDERING INFORMATION

### Part Identifier:

83-3005TC-XX.XX

└─ Attenuation Value

## SPECIFICATIONS

### 1.0 ELECTRICAL

Nominal Impedance:	50 ohms
Frequency Range:	DC - 4.0 GHz
Attenuation Values Available:	1 through 20 dB in 1 dB increments
Attenuation Accuracy:	1 through 10 dB $\pm$ 0.5 dB 11 through 20 dB $\pm$ 1.0 dB
Input Power CW:	10 watts @ 100°C heat sink, derated linearly to zero power at 150°C
Peak Power:	100 Watts (based on 10us pulse width and 1% duty cycle)
VSWR:	DC - 2.0 GHz 1.15:1 Max 2.0 - 4.0 GHz 1.35:1 Max

### 2.0 ENVIRONMENTAL

Operating Temperature:	-55°C to +150°C
Non-operating Temperature:	-65°C to +150°C
Temperature Coefficient:	+/-200 PPM / °C max

### 3.0 MARKING

Unit Marking:	Attenuation value, legibility and permanency per MIL-STD-130
---------------	--

### 4.0 QUALITY ASSURANCE

Sample Inspect Per MIL-STD-105, Level II, 1.0% AQL.

Visual and Mechanical Examination for Conformance To Outline Drawing Requirements.  
Measure Attenuation and VSWR  
Data Retention – Standard

### 5.0 PACKAGING

Standard Packaging:	Tray
---------------------	------

# ATTENUATOR TAB & COVER 10 WATT



DATA SHEET



PART SERIES: 83-3005TC-XX.XX

SHEET 2 OF 2  
Dwg 83-3005TC

EN 13-3533  
Revision -

## 6.0 MECHANICAL

Substrate Material:	Beryllium Oxide
Resistive Film:	Thin Film
Cover Material:	Alumina
Tab Material:	Beryllium Copper
Tab Finish:	Tin/Lead
Metric Dimensions:	Provided for reference only

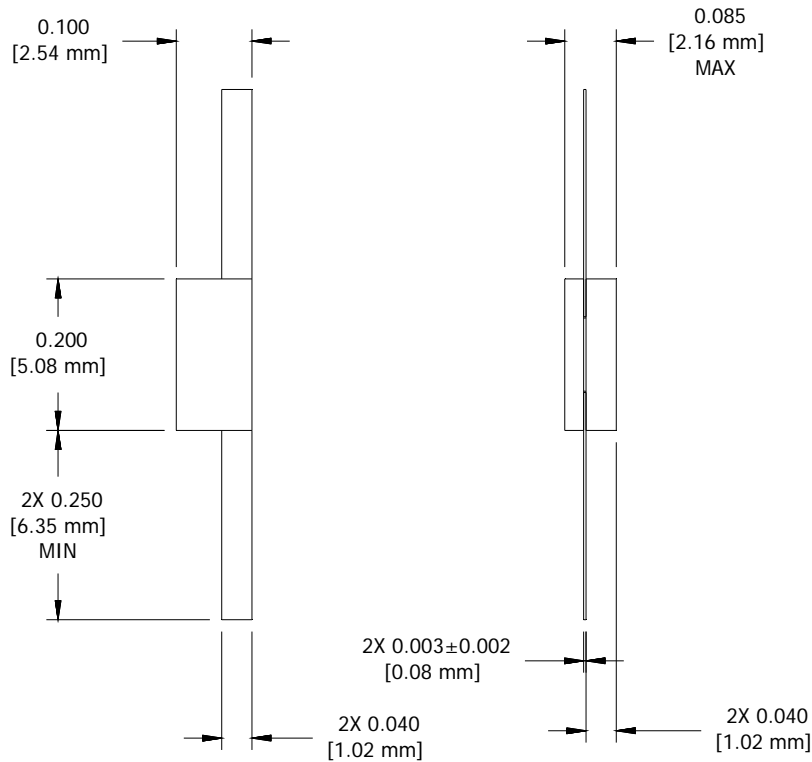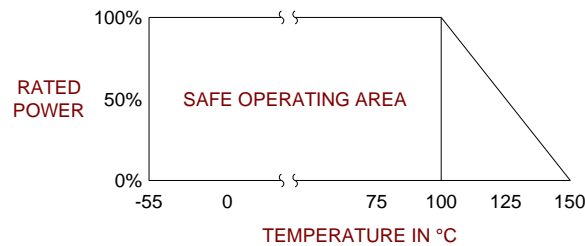

Unless Otherwise Specified: TOLERANCE: X.XX = ± 0.02 X.XXX = ± 0.010