


EDD

DRAWING NO.:

R125-500B-*

REV. **A**

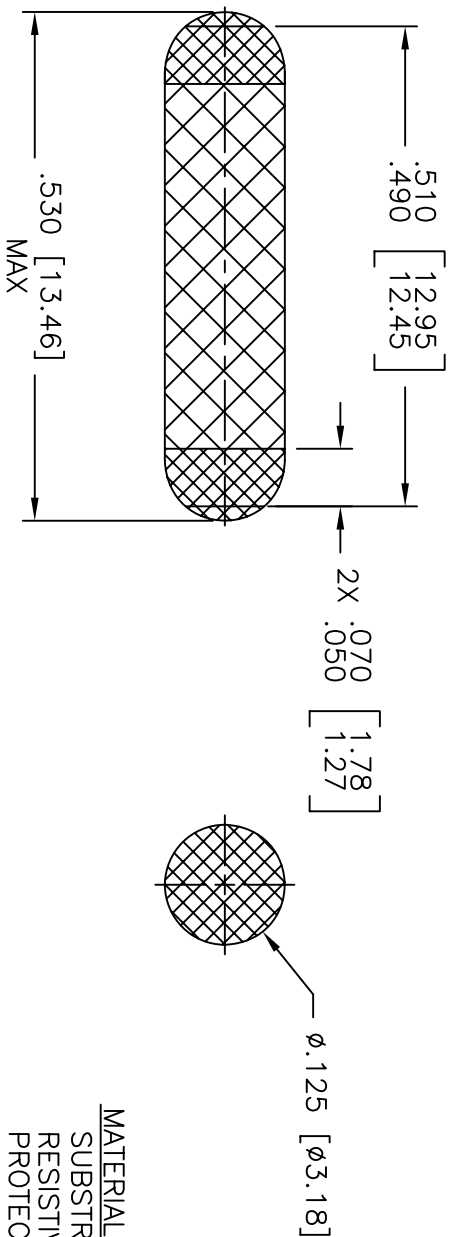

MATERIALS:
 SUBSTRATE: BERYLLIUM OXIDE
 RESISTIVE FILM: THIN FILM
 PROTECTIVE COATING: EPOXY PAINT

FINISH:
 ROHS COMPLIANT
 TERMINALS: SOLDER DIPPED Sn96
TECHNICAL: (RESISTOR)
 AVERAGE POWER (WATTS): 0.5 IN AIR
 DC RESISTANCE: ± 5% STANDARD
 RESISTANCE RANGE (OHMS): 50 & 100
 TEMPERATURE COEFFICIENT: ± 200 PPM MAX
 OPERATING TEMPERATURE (°C): -55° TO +150°

REV.	DESCRIPTION	DRAWN	APVD.	RLS# 02204 UNLESS OTHERWISE SPECIFIED 1. DO NOT SCALE DRAWING 2. DIMENSIONS ARE IN INCHES 3. DIMENSIONS ARE AFTER PLATING 4. CORNERS, EDGES AND FILETS: R .005 MAX 5. SURFACE ROUGHNESS: 63/ 6. REMOVE ALL BURRS	APVD DATE	REFERENCE - MATERIAL - FINISH -	SCALE 5/1 CAGE CODE 2Y194 ID NO. A MFG:	SIZE A DRAWING NO.: R125-500B- DRAWN:	REV. A SHEET 1 OF 1
				TOLERANCES .X ± .XX ± .XXX ± .005 ANGLES X° ±		TITLE RESISTOR, ROD			
				THE INFORMATION CONTAINED HEREIN IS: (A) CONSIDERED PROPRIETARY TO FLORIDA RF LABS INC.; (B) PROTECTED BY COPYRIGHT OWNED BY FLORIDA RF LABS INC.; (C) CONSIDERED A WORK FOR HIRE UNDER COPYRIGHT LAW; (D) PROTECTED BY TRADE SECRET LAWS WHICH MAKE LEGAL THE MISAPPROPRIATION OF THIS INFORMATION; AND (E) IS TO BE KEPT SECRET FOR THE PROTECTION OF THE WHOLE SUPPLY OF THIS INFORMATION. NO PART OF THIS INFORMATION IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE EXPRESS WRITTEN CONSENT OF A QUALIFIED EXECUTIVE OF FLORIDA RF LABS INC.					

