




REQUIREMENTS	RATING	REQUIREMENTS	RATING
NOMINAL IMPEDANCE (OHMS)	50	VIBRATION	MIL-STD-202 METHOD 204 COND. D (20 G's)
FREQUENCY RANGE (GHz)	DC-12.4		
TEMPERATURE COEFFICIENT	200 PPM	SHOCK	MIL-STD-202 METHOD 213 COND. I (100 G's)
OPERATING TEMPERATURE (°C)	-55 TO +125		
VSWR	1.05 + .01f (f=GHz)	THERMAL SHOCK	MIL-STD-202 METHOD 107 COND. B (-65 TO +125 °C)
AVERAGE POWER (WATTS)	0.5		
DC RESISTANCE	50 OHMS ± 5%	BAROMETRIC PRESSURE	MIL-STD-202 METHOD 105 COND. C
		INTERFACE DIMENSIONS	MIL-STD-348 SMA SERIES

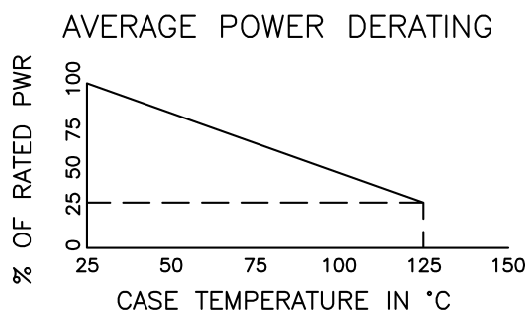

TORQUE REQUIREMENT	MIL-D-39030/3 SMA SERIES 7-10 IN/LBS (PER PAIR)
--------------------	---