

SpaceNXT™ QT Series

Space Qualified Phase Stable Coaxial Cable Assemblies



SpaceNXT™ QT Series

Space Qualified Phase Stable Coaxial Cable Assemblies



Smiths Interconnect's SpaceNXT™ QT Series offers improved phase stability over a wide range of temperatures found in space environments while meeting all NASA/ESA outgassing specifications. It is equipped with ETFE radiation resistant jacket materials. This combination enables customers to enjoy the benefits of lower cost of ownership while improving system performance.

The SpaceNXT™ QT series is part of Smiths Interconnect's overarching initiative entailing the creation of a full range of higher reliability products for next generation space applications that are readily available on the market.

All products have passed design verification and are rigorously tested per customer and industry application requirements. SpaceNXT™ QT series assemblies are manufactured with low loss fluoropolymer dielectrics and constructed with materials which meet the outgassing requirements of NASA/ESA when tested per ASTM E595.

The outer jackets use ETFE material for increased radiation resistance. SpaceNXT™ 065QT, 100QT, and 160QT cables are specifically designed for space flight applications on LEO, MEO, and GEO satellite platforms and offered with standardized testing sequences, reducing delivery times and overall cost of ownership.

Specifically designed and tested for next generation commercial space applications.

Features and Benefits

- Mode Free performance up to 40–110 GHz - for high frequency applications depending on connector & cable configuration
- Stainless steel connectors or BeCu Connectors - rated >500 mating cycles where applicable
- Phase Stable Fluoropolymer dielectric - Minimized electrical length changes over a wide temperature range
- Low loss dielectric - reduced attenuation and power loss
- >-90dB shielding effectiveness - superior RF leakage performance and minimized cross talk
- ETFE Jackets - increased radiation resistance
- Compliant to NASA/ESA outgassing specifications
- Phase stable testing available on request including "tracking" cable pairs
- 100% flight test data available

Applications:

- Satellite Communication & Navigation
- Military, Commercial and Scientific Programs
- GEO/MEO/LEO and Small Satellites
- Manned Space Flight

Technical Characteristics

SpaceNXT™ QT Series	065QT	100QT	160QT
Electrical			
Frequency, Max (GHz)	110	50	40
Impedance, nominal (Ω)	50	50	50
Velocity of Propagation (%)	79	80	80
Shielding Effectiveness, 18 GHz (dB/ft)	>100	>100	>100
Capacitance (pF/ft)	26	25.4	23.3
Delay (ns/ft), (ns/meter)	1.29, 4.24	1.27, 4.17	1.27, 4.17
Attenuation k1 (db/100ft) @ 23 deg C	0.934	0.534	0.341
Attenuation k2 (db/100ft) @ 23 deg C	0.000602	0.000803	0.000891


Attenuation (Typical) at any Frequency = $k_1 \times \text{SqRt}(\text{FMHz}) + k_2 \times (\text{FMHz})$

Mechanical & Environmental

Weight (lbs/100ft), (Kg/100m)	0.412, 0.614	1.10, 1.64	2.47, 3.68
Temperature Range ($^{\circ}\text{C}$)	-65 to +165	-65 to +165	-65 to +165
Minimum Bend Radius (inch), (mm)	0.250, 6.35	0.350, 8.90	0.500, 12.70

Construction

Inner Conductor	A	Solid SPC	Solid SPC	Solid SPC
Dielectric	B	Foam Fluoropolymer	Foam Fluoropolymer	Foam Fluoropolymer
First Outer Shield	C	SPC Spiral	SPC Spiral	SPC Spiral
Second Outer Shield	D	SPC Round	SPC Round	SPC Round
Jacket (inch O.D.)	E	0.65, EFTE	0.100, EFTE	0.160, EFTE



SpaceNXT™ QT



SpaceNXT™ 065QT



SpaceNXT™ 100QT



SpaceNXT™ 160QT


Technical Characteristics

Attenuation (dB/100ft)

GHz	065QT	100QT	160QT
1	30.1	17.7	12.3
3	52.9	31.7	22.4
5	69.0	41.8	30.0
10	99.4	61.5	45.2
12	109.5	68.1	50.4
18	136.1	86.1	64.9
26	166.2	107.0	82.1
32	186.3	121.2	94.0
40	210.9	139.0	109.0
50	238.9	159.7	

Typical Cable Loss at +25° C & Sea Level

Attenuation vs Frequency

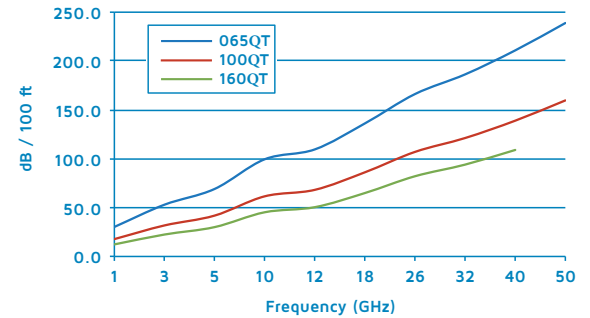


Average Power Rating (Watts)

GHz	065QT	100QT	160QT
1	49.3	155.7	300
3	29.9	93.5	150
5	23.0	69.3	115
10	15.2	48.2	75
12	13.6	42.5	70
18	11.0	34.1	50
26	9.2	27.5	
32	8.1	25.6	
40	7.1	21.9	
50	6.3	19.3	

Power Rating at +25° C & Sea Level

Average Power Rating

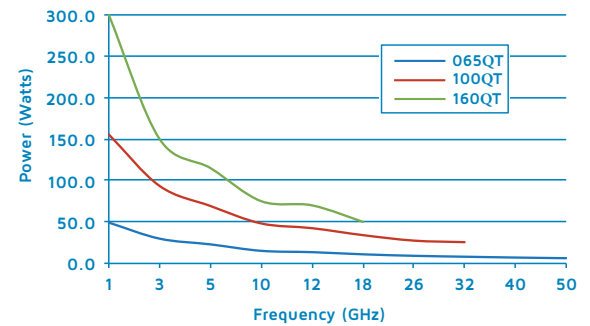


Phase vs. Temperature (PPM)

Temperature (°C)	065QT	100QT	160QT
-55	474	478	1014
-35	355	359	895
-15	237	239	656
5	59	60	179
25	59	0	0
45	59	0	-179
65	0	-60	-358
85	0	-119	-477
105	0	-179	-477

Typical Values

Phase vs. Temperature (°C)

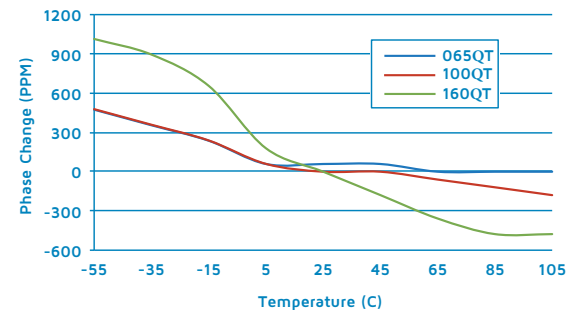


Technical Characteristics

Phase vs. Flexure

Frequency (GHz)	065QT (+/-deg)	100QT (+/-deg)	160QT (+/-deg)
0	0	0	0
10	2.7	2	3
20	6	4	6
30	8	6	9
40	12.3	8	12
50	15	10	

Typical Values +25°C

Phase vs. Flexure

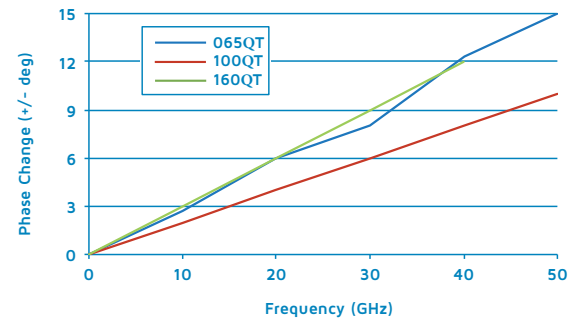

Cable Code	Connector Code	Series	Gender	Type	C-Nut Style ¹	Body Material ²	Body Finish ³	Loss per GHz	Frequency Max GHz
065QT, 100QT, 160QT	SMS	SMA	Male	Straight	H	SS	P	0.01	18
065QT, 100QT, 160QT	KMS	2.92mm	Male	Straight	H	SS	P	0.01	40
065QT, 100QT	MMS	2.4mm	Male	Straight	H	SS	P	0.01	50
065QT, 100QT	SMPFS	SMP	Female	Straight	N/A	Be	G	0.02	40
065QT, 100QT	SMPFR	SMP	Female	Right Angle	N/A	Be	G	0.02	40
065QT, 100QT	SMPMFS	SMPM	Female	Straight	N/A	Be	G	0.02	50
065QT	MLFS	Mini-Lock	Female	Straight	L	Be	G	0.01	110

¹ C-Nut Style: H=Hex, K=Knurled, HK=Hex Nut & Knurled, L=Locking² Body Materials: B=Brass, SS=Stainless, Be=Beryllium Copper³ Body Finish: N=Nickel, S=Silver, G=Gold, P=Passivated

Gender of connector is determined by center conductor

Cable Code	Option Code	Option Description	Option Details
065QT, 100QT, 160QT	+/-2.8 ps ⁴	Phase Match	Standard Tolerance of +/-2.8ps

⁴ for phase matched assemblies (+/-2.8ps) must be added at the end of the standard part number

example: SMS-160QT-24.0-SMS +/-2.8ps

Custom Options:

The above options represent the most used cable and connector types. Smiths Interconnect offers a wide range of cables and connectors.


If you do not find the option you are looking for in the catalog, please consult our sales department or send an inquiry via our website.

Qualification Summary

Test Plan	Description	
TP-9229	Internal Test Procedure for Phase Over Temperature Requirements	
Products Tested	QTY	Testing Sequence
KMS-105Q-48.0-KMS +/-2.8ps	4	1,2
KMS-190Q-48.0-KMS +/-2.8ps	4	1,2
SMS-200Q-48.0-SMS +/-2.8ps	4	1,2
Testing Sequence 1	Requirements	Results
Phase Match Assemblies	+/-2.8ps	Pass
VSWR and Insertion Loss	Per Cable Specifications	Pass
Phase Over Temperature	Characterization Test	Recorded
VSWR and Insertion Loss	Per Cable Specifications	Pass
Testing Sequence 2	Requirements	Results
Phase Tracking Over Temperature	Measure and Record Results	Recorded
TP-9140	Internal Test Qualification Procedure for Space Flight Cables	
Products Tested	QTY	Testing Sequence
SMS-200Q-12.0-SMS	7	2
SMS-105Q-12.0-SMS	5	2
SSMS-060Q-12.0-SSMS	5	2
SMS-200Q-39.4-SMS	4	3
TMS-200Q-39.4-TMS	4	3
Cable 200Q	4 ft.	1
Cable 190Q	1 ft.	1
Testing Sequence 1	Requirements	Results
Group A Inspection Tests	Per MIL-DTL-17H	Pass
Group B Inspection Tests	Per MIL-DTL-17H	Pass
Testing Sequence 2	Requirements	Results
Insertion Loss (pre-Radiation)	Per Cable Specifications	Pass
Radiation Dosage	Cables Exposed to Various Levels of Radiation	Recorded
Insertion Loss (post-radiation)	Measure and Record Delta to Original Results	Recorded
Testing Sequence 3	Requirements	Results
DWV	Mil-STD-202 Method 301	Recorded
Radiation Dosage	Measure and Record Results	Recorded
Random and Sine Vibration	MIL-STD-202 Method 214A Conditions IIG, Swept Sine, 5-100Hz, 2 oct/min	Recorded
Thermal Cycles	100X Thermal Cycles	Recorded
Shielding Effectiveness	Measure and Record Results	Recorded
CW Power	Measure and Record Results	Recorded
Connector Retention	Measure and Record Results	Recorded
X-ray	MIL-STD 202 Method 209	Recorded
DPA	Verification of Mechanical Integrity	Recorded
VSWR and Insertion Loss	Recorded Between Each Step Above	Pass

Summary: Cable and connectors individually all passed industry requirements outlined in MIL standards for group A and B tests. Cable assemblies successfully passed testing sequences.

How To Order

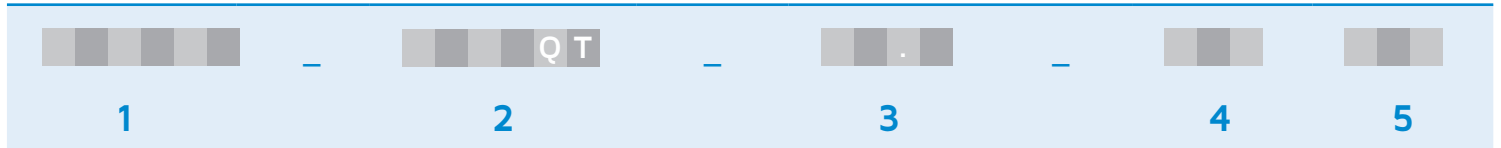

1 Connector #1

S M S

SMA Male Straight

S M P F S

SMP Female Straight

S M P F R

SMP Female Right Angle

K M S

2.9mm Male Straight

M M S

2.4mm Male Straight

S M P M F S

SMPM Female Straight

M L F S

Mini-Lock Female Straight

2 Cable (fixed)

0 6 5

SpaceNXT™ 065QT

1 0 0

SpaceNXT™ 100QT

1 6 0

SpaceNXT™ 160QT

3 Length (inches)

3 6 . 0

Example: 36 in.

4 Connector #2

S M S

SMA Male Straight

K M S

2.9mm Male Straight

S M P F S

SMP Female Straight

5 Assembly Option

+/- 2.8 ps

+/-2.8ps Phase Matched Electrical Length

_

None

Worldwide Support

Connectors

Americas

Sales

connectors.uscsr@smithsinterconnect.com

Technical Support

connectors.ustechsupport@smithsinterconnect.com

Europe

Sales

connectors.emeacsr@smithsinterconnect.com

Technical Support

connectors.emeatechsupport@smithsinterconnect.com

Asia

Sales

asiacsr@smithsinterconnect.com

Technical Support

asiatechsupport@smithsinterconnect.com

Fibre Optics & RF Components

Americas

Sales

focom.uscsr@smithsinterconnect.com

Technical Support

focom.techsupport@smithsinterconnect.com

Europe

Sales

focom.emeacsr@smithsinterconnect.com

Technical Support

focom.techsupport@smithsinterconnect.com

Asia

Sales

focom.asiacsr@smithsinterconnect.com

Technical Support

focom.techsupport@smithsinterconnect.com

Semiconductor Test

Americas

Sales

semi.uscsr@smithsinterconnect.com

Technical Support

semi.techsupport@smithsinterconnect.com

Europe

Sales

semi.emeacsr@smithsinterconnect.com

Technical Support

semi.techsupport@smithsinterconnect.com

Asia

Sales

semi.asiacsr@smithsinterconnect.com

Technical Support

semi.techsupport@smithsinterconnect.com

RF/MW Subsystems

Americas, Europe & Asia

Sales

subsystems.csr@smithsinterconnect.com

Technical Support

subsystems.techsupport@smithsinterconnect.com

Connecting Global Markets

more > [smithsinterconnect.com](https://www.smithsinterconnect.com) | [in](#) [X](#) [v](#)