

**ORDERING INFORMATION****PART IDENTIFIER: 73-XXXX-XXX**

(XXX) = Ω/SQ.  
 (XXXX) = See Table Chart.

Series	Substrate Material	T = Thickness
73-0154-XXX	Mica	0.002
73-0155-XXX	Mica	0.003
73-0156-XXX	Mica	0.005

**SPECIFICATIONS****1. ELECTRICAL:**

Resistance Range: 50 to 400 Ω/SQ.  
 Resistance Tolerance: ± 10%.  
 Dielectric Constant: 6.0 Typical @ 1 Hz.

**2. ENVIRONMENTAL:**

Operating Temperature: -55°C to +150°C.  
 Non-operating Temperature: -55°C to +150°C.  
 Moisture Sensitivity Level: MSL 1 - Unlimited.

**3. MARKING:**

Unit Marking: None.

**4. QUALITY ASSURANCE:**

100%visual and mechanical inspection.  
 for Conformance to Outline Drawing Requirements.  
 Periodic electrical inspection performed for commercial grade products.

**5. PACKAGING:**


Standard Packaging: Individual Bag Package.

**6. MECHANICAL:**

Substrate Material: Mica.  
Resistive Film: Nichrome.  
Protective Coating: Clear.

73-XXXX-XXX	Substrate Material	L = Length	W = Width	T = Thickness
73-0154-XXX	Mica	5.00	2.00	0.002 ± 0.002
73-0155-XXX	Mica	5.25	2.25	0.003 ± 0.002
73-0156-XXX	Mica	5.25	2.25	0.005 ± 0.002

**7. FOOTPRINT:**

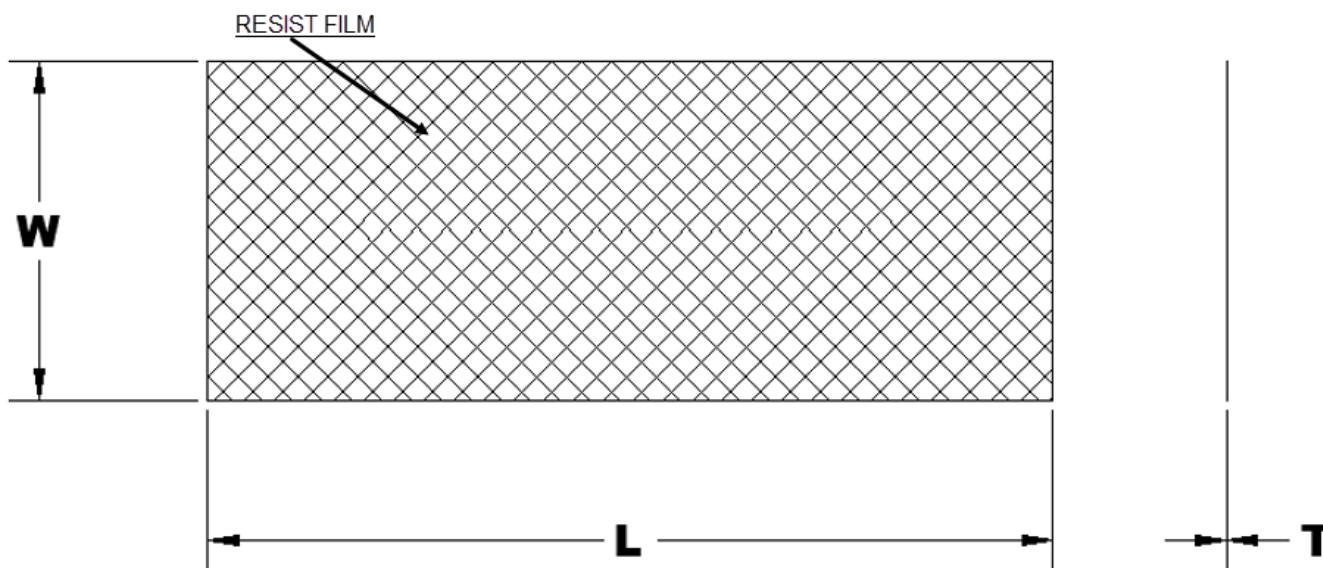

Unless Otherwise Specified: TOLERANCE: X.XX = ± 0.01.