


ORDERING INFORMATION

PART IDENTIFIER: 73-XXXX-XXX



73-XXXX-XXX	Substrate Material	T = Thickness
73-0157-XXX	Mylar	0.001
73-0166-XXX	Mylar	0.002
73-0158-XXX	Mylar	0.005
73-0159-XXX	Mylar	0.010

SPECIFICATIONS

1. ELECTRICAL:

Resistance Range:	50 to 400 Ω /SQ.
Resistance Tolerance:	\pm 10%.
Dielectric Constant:	4.3 S/B 3.3 Typical @ 60 Hz.
Dielectric Strength	6,000 Volts/MIL, AC.

2. ENVIRONMENTAL:

Operating Temperature:	-55°C to +150°C.
Non-operating Temperature:	-55°C to +150C.
Moisture Sensitivity Level:	MSL 1 - Unlimited.

3. MARKING:

Unit Marking:	None.
---------------	-------

4. QUALITY ASSURANCE:

100% visual and mechanical inspection.

for Conformance to Outline Drawing Requirements.

100% electrical inspection performed for commercial grade products.

5. PACKAGING:

Standard Packaging:	Individual Bag Package.
---------------------	-------------------------

HIGH FREQUENCY MYLAR FILM CARD

DATASHEET PART SERIES:73-XXXX-XXX

Sheet 2 of 2
Doc# 73-XXXX-XXX-1016385


ECO-083939
Revision B

6. MECHANICAL:

Substrate Material: Mylar.
Resistive Film: Nichrome.
Terminal Material: Silver.
Protective Coating: Clear.

73-XXXX-XXX	Substrate Material	T = Thickness
73-0157-XXX	Mylar	0.001 ± 0.002
73-0166-XXX	Mylar	0.002 ± 0.002
73-0158-XXX	Mylar	0.005 ± 0.002
73-0159-XXX	Mylar	0.010 ± 0.002

7. FOOTPRINT:

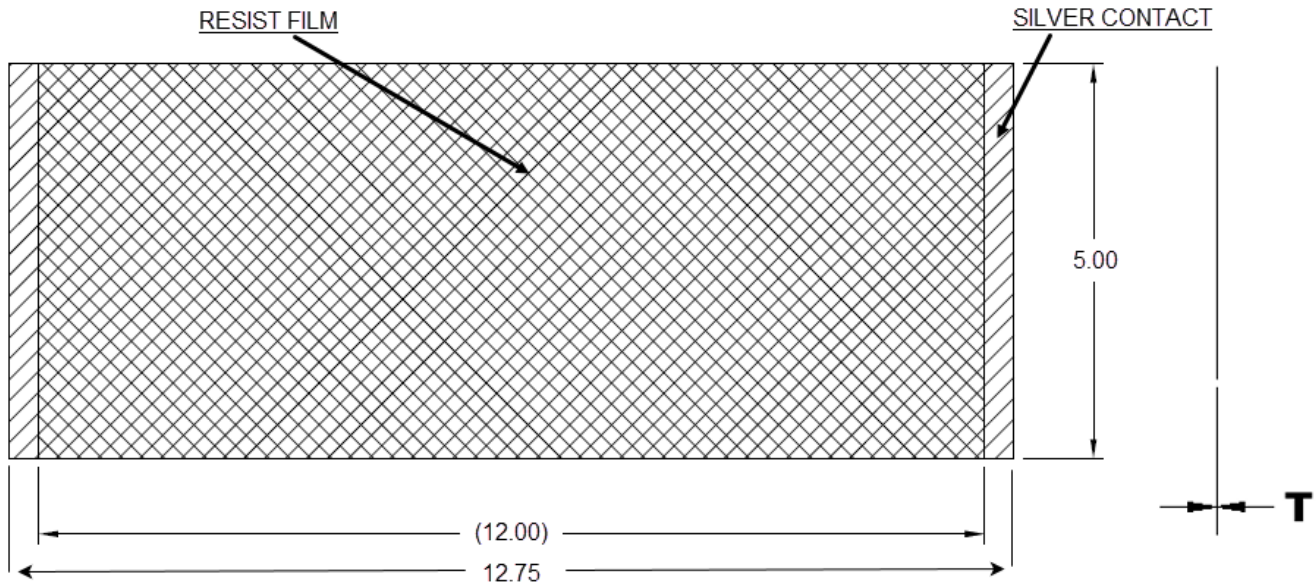

Unless Otherwise Specified: TOLERANCE: X.XX = ± 0.01 X.XXX = ± 0.002.