



0.76 mm (0.030 in.) contacts

Female contacts (sockets)

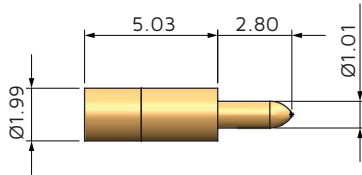


HYP076S127A001

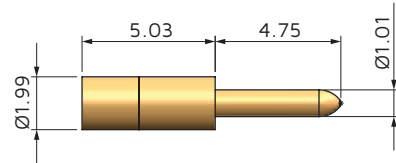

HYP076S127A002

Ordering Number	Internal Part Number	Termination Style	Contact Resistance (mΩ)	Current Rating (A)	Extraction Force (N)	Contact Life (cycles)	Materials	Plating (µm)
HYP076S127A001	YSK0076-011AH	Straight	<5.0	5	0.89	Up to 100k	BeCu/Brass	>1.27 gold
HYP076S127A002	YSK0076-012AH	Straight	<5.0	5	0.89	Up to 100k	BeCu/Brass	>1.27 gold

Male contacts (pins)

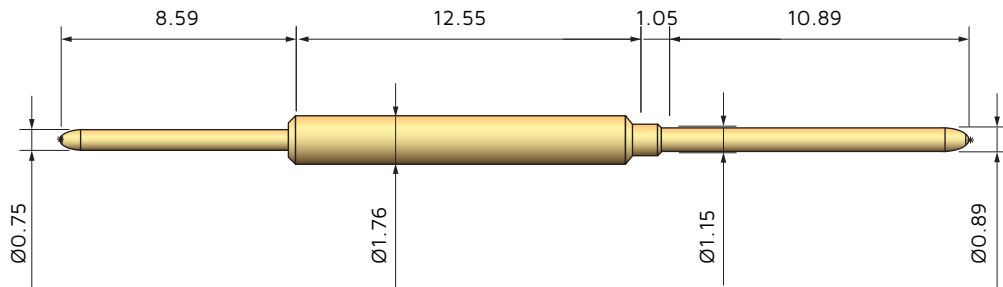

HYP076S127A001

Ordering Number	Internal Part Number	Termination Style	Materials	Plating (µm)
HYP076S127A001	YPN0076-101H	Straight	Brass	>1.27 gold