



2.00 mm (0.079 in.) contacts

Female contacts (sockets)

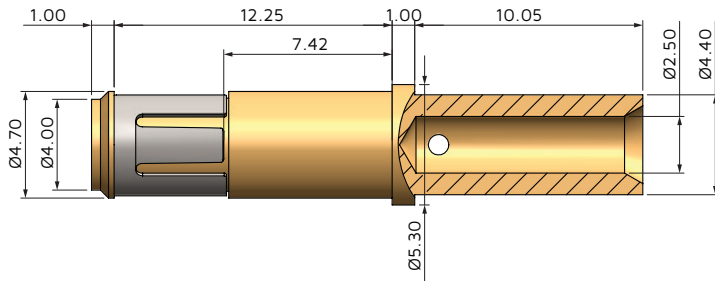


HYPS200C020F001

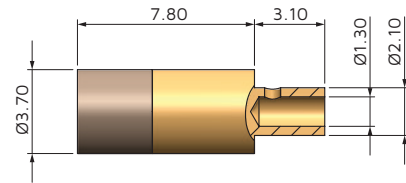

HYPS200C025I001

Ordering Number	Internal Part Number	Termination Style	Contact Resistance (mΩ)	Current Rating (A)	Extraction Force (N)	Contact Life (cycles)	Materials	Plating (µm)
HYPS200C020F001	0200422-20RN1	Crimp	<2.0	15	1.2 to 4.0	Up to 100k	PhBz/Brass	>0.20 gold
HYPS200C025I001	23420-Z72	Crimp	<2.0	15	1.2 to 4.0	Up to 100k	PhBz/Brass	>0.25 gold

Male contacts (pins)

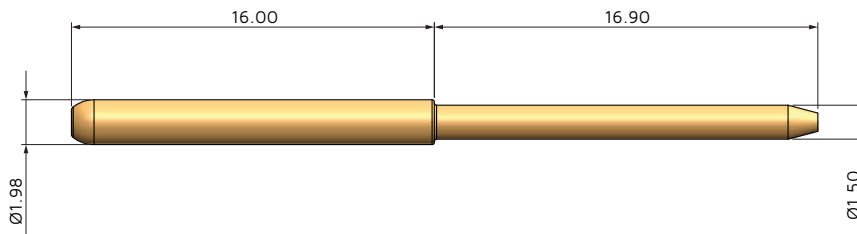

HYPP200S025I001

Ordering Number	Internal Part Number	Termination Style	Materials	Plating (µm)
HYPP200S025I001	21602-T12	Straight	Copper	>0.25 gold